


# **G02M Smart Pet GPS Tracker**

## **GPS+WIFI+LBS**



This device is a water resistance IP65 remote tracking device with built-in GPS/GSM/GPRS technology. It's mainly using for pet monitoring and protecting.

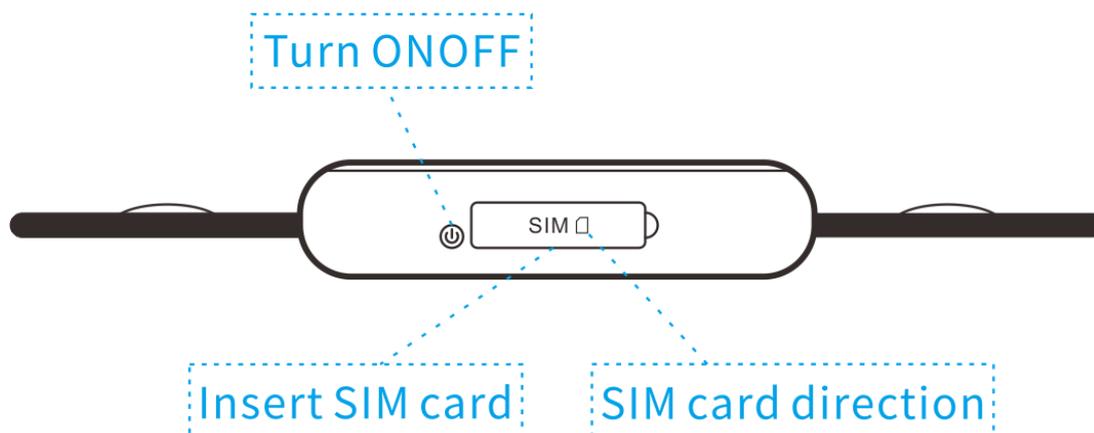


### SIM card Installation

Prepare a **2G Nano SIM** card from the user's local operator.

Insert SIM card and make sure it's activated with credits


**Note:** Before installing the SIM card, check if the SIM card has PIN code or not, if yes, please use a cell-phone to unlock the card's PIN code.

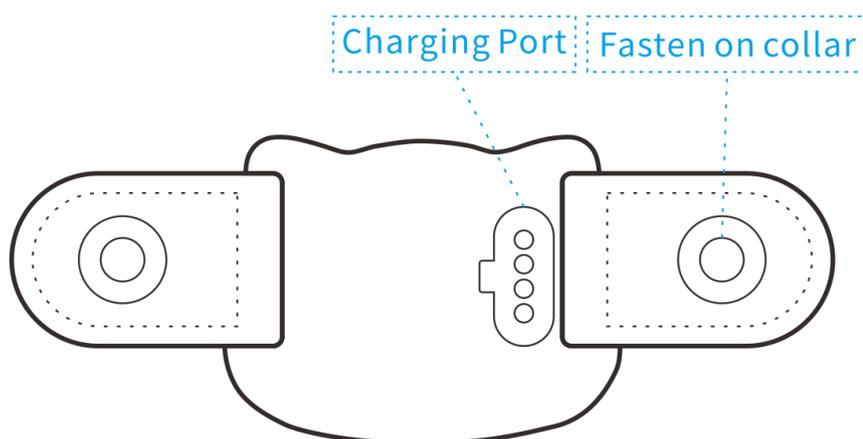

### Device Charging

For the first time use, please fully charge the battery for around 3~4 hours

**※ To get an initial location, use outdoors so the device may fix onto the satellites.**

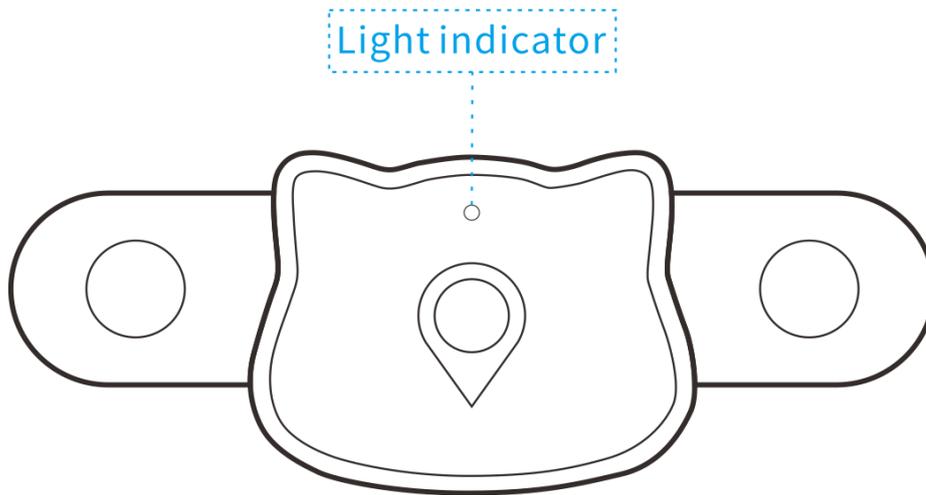

### Button & Indicator

- Long pressing button to power on device; Indicator will show off after read SIM card; if indicator keep flashing represent SIM card not insert properly.
- Long pressing more than 6s until indicator off to power off device.

### How to connect to APP & GPS Platform

If you are using local SIM card, use your phone to send command message to device's phone number (Skip this step if use data SIM card from factory)

Step 1: Configure APN

**Command:** `apn123456+space+ApnUserName+space+ApnPassword`

**Example:** `apn123456 internet`

Notes: Some APN without user name and password, so please leave it blank.

“internet” is the APN from the SIM card provider; make call to your operator to confirm APN details.

Step 2. Change IP Port(Skip this step if you are using “secumore1” APP)

**Command:** **adminip123456+space+IP/Domain+space+Port**

**Example:** **adminip123456 [www.gps228.com](http://www.gps228.com) 8989**

Step 3. Check APN & IP, Port

If your device can't online, send SMS to check device setting,

**Command:** **check123456**


## GPS Tracking System

Website: [www.secumore1818.com](http://www.secumore1818.com)

Step 1: Download APP “secumore1” from app store


Step 2: Choose “User/IMEI/Plate No.” login as below photo

Step 3: Use IMEI as user name, password 123456

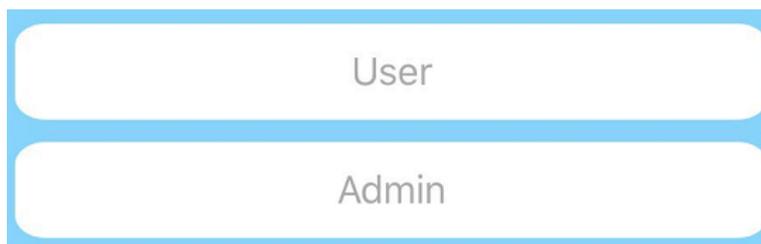


The image shows a screenshot of a login interface. It consists of two vertically stacked input fields, each with a light blue border and rounded corners. The top field is labeled 'User' and the bottom field is labeled 'Admin'. Both fields are currently empty.

Step 4: Once configured APN SMS, device will show location:

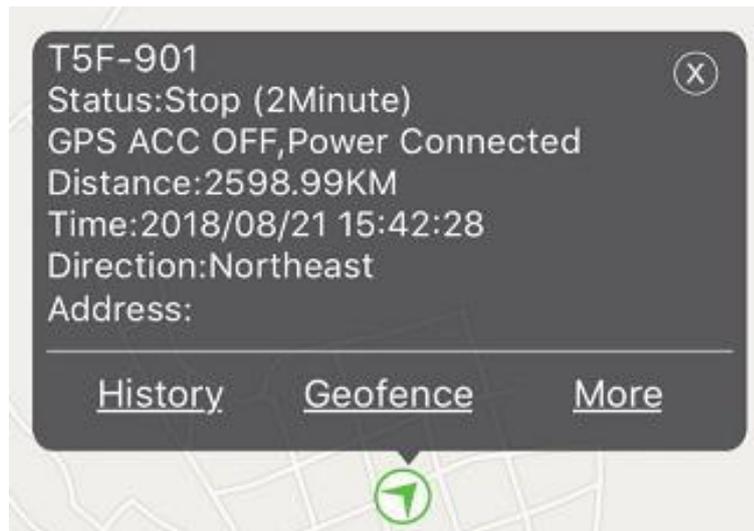


Step 5: Click “ More” button → Click “ Device Info” button→ Click “license plate” button to change the user name you need to replace IMEI number

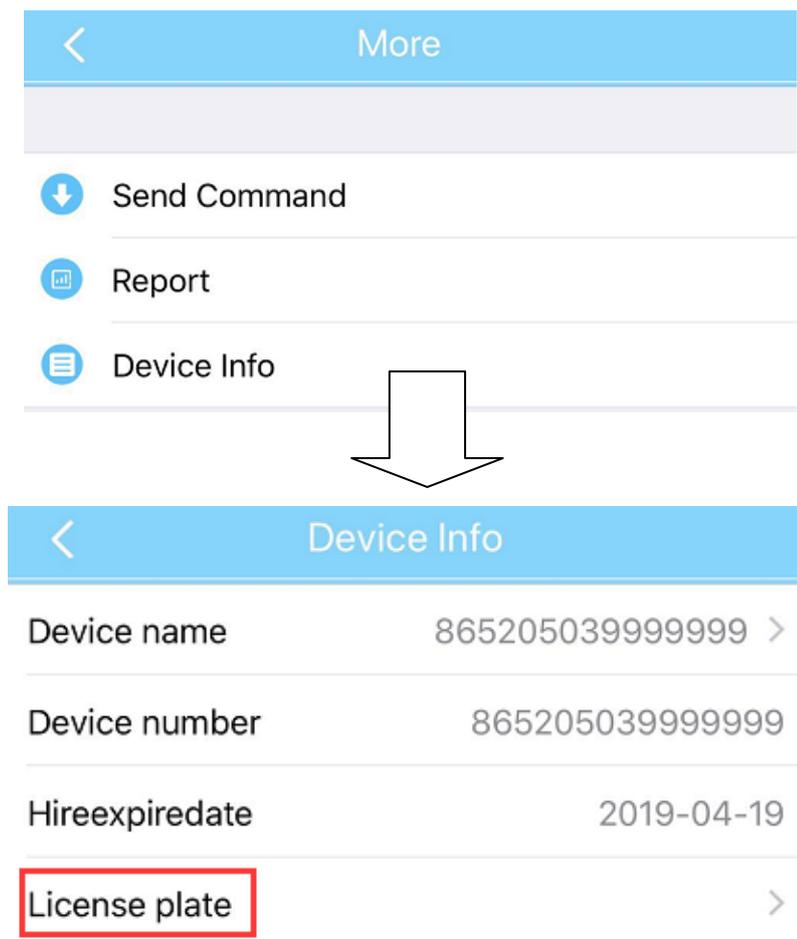

Step 6: Click “ Send Command”→ Click “Time Interval” button change update time interval

- **If need fast tracking to show accurate location, set time interval “60” that can last 6hours.**
- **If when the pet is sleep/static/at home, set time interval “7200” that can standby 2 days. It will show location not accurate for power saving purpose.**

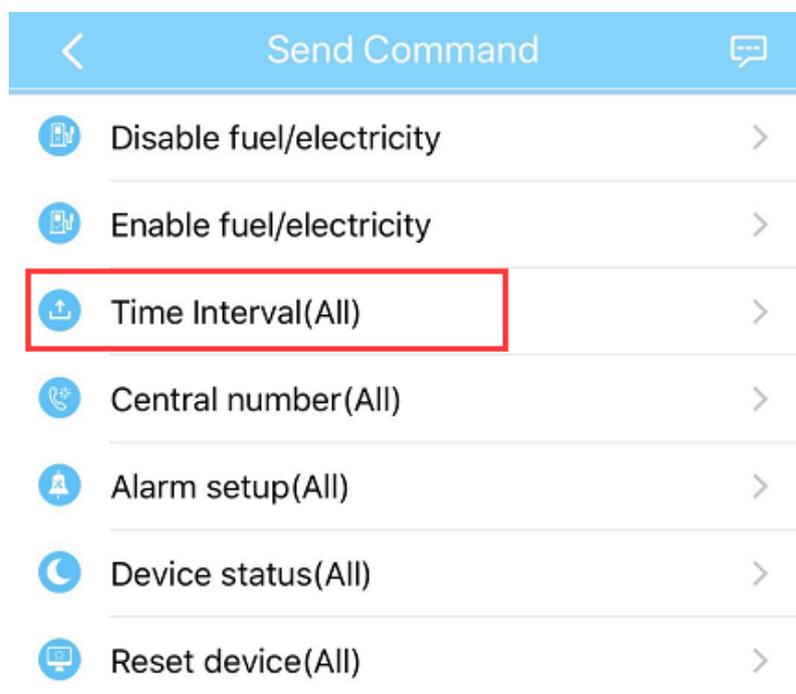

## APP Support Geo-fence & History Trace



Trouble Shooting	
APP can't show location	Make sure you configured APN SMS; Activated GPRS data service for SIM card; SIM card support 2G network
Indicator keep flashing	Check SIM card insert properly
Location not accurate when indoor	Indoor: device will locate via LBS/WIFI to show a roughly location. Please move outdoor to get GPS signal and Change short time interval "60"
Location not update in time even at outdoor	Device is default power-saving mode, you need change short time interval "60" from APP command